


E3 PLSS DATABASE DOCUMENTATION

Edition E3 Statewide PLSS Database Project

E3 PLSS DATABASE OVERVIEW

The E3 PLSS database (E3) is defined by the specifications outlined in this document. The E3 PLSS database, part of a multi-year effort, was created as a sub-project of the greater Version 7 Statewide Parcel Map Database Project (V7 Project), a collaboration between the Wisconsin Land Information Program, the State Cartographer’s Office, and county data contributors. More information about the Statewide Parcel Map Initiative can be found [here](#).

The E3 database contains a collection of all uniquely identifiable local-level PLSS data available in digital format and aggregates that data into a standardized schema and format. The construction of the PLSS corner locations contained within the database relies on the local-level coordinate information. This unique aspect of the database, allows for an accurate representation of the on-the-ground location of the PLSS corner, resulting in a more accurate polygon section layer creation. Whenever possible, county PLSS corner coordinate information was used for the construction of the section polygons. In total, 195,229 PLSS corners were used in the section polygon creation process. Of those corners used, 130,750 (~67%) were county-contributed corners and 64,479 (~33%) were GLO Landnet or SCO points (either digitized from paper maps or derived by protracting from other corners).

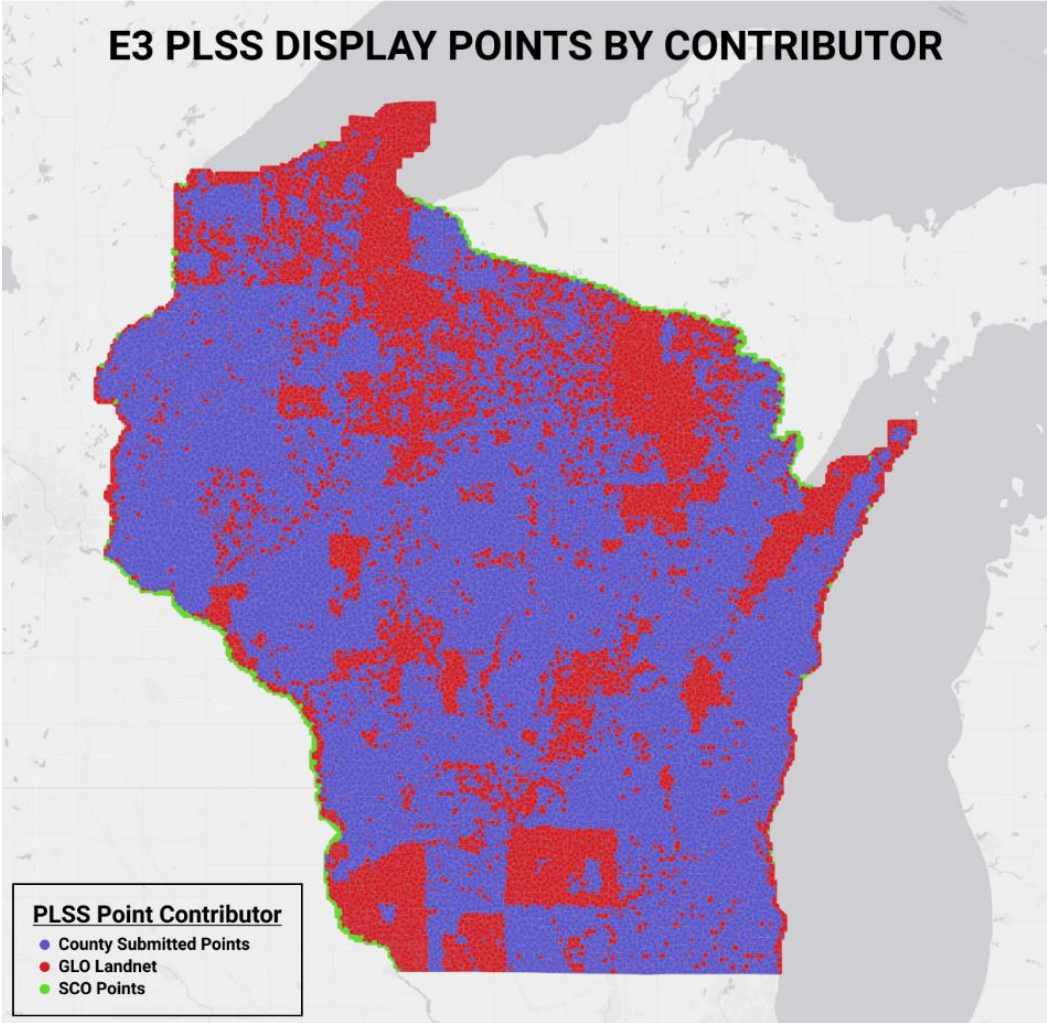

DATABASE CHARACTERISTICS

County Coordinates

The E3 PLSS database is based on accurate county corner coordinate values where available. The E3_PLSS_Points feature class includes 245,064 points submitted by 72 counties. Corner records without complete coordinate reference information were maintained in the points feature class as attribute only records.

GLO Landnet

The E3 database uses an *enhanced version* of the Wisconsin Department of Natural Resources (DNR) 1994 PLSS layer, referred to as “GLO Landnet”. This layer contains important information obtained from the Wisconsin General Land Office Survey records, specifically information identifying which corners were part of the original survey and subdivision of the state of Wisconsin. Information about the original field notes and the original field notes themselves can be found [here](#).

These GLO Landnet corner coordinates were used where county data was not available. This layer serves as the “backbone” to the corner point network and all GLO Landnet corners are included in E3, even when county data exists. The (194,799) points existing in GLO Landnet served as the basis to make point associations with the native county points in the E3 database.

To facilitate the inclusion of quarter-section and quarter-quarter-section polygon layers within the E3 PLSS database, additional corners were required and extracted from DNR Landnet quarter-quarter-section polygons. The methodology used created an additional 773,305 corners and allowed for the creation of these more granular section subdivided layers.

Standardized Indexing System


The E3 databases uses a standardized indexing system for all corner points based on the Wisconsin Corner Point Identification System, commonly known as the Romportl System. See SCO publications <https://www.sco.wisc.edu/pubs/statewide-plss-corner-numbering-system/> and <https://www.sco.wisc.edu/pubs/extended-statewide-plss-corner-numbering-system/>.

Industry Standards

The E3 database is informed by existing federal PLSS standards (CadNSDI) tailored to the specific needs of Wisconsin, particularly by considering county data characteristics, the statewide indexing standard, and de facto standards based on DNR Landnet. The latest Wisconsin PLSS CadNSDI dataset can be found [here](#).

[Display Point Selection for Polygon Creation](#)

To create polygons, a single corner representation had to be identified and selected. In most cases, this selection had to be made from multiple corner point realizations representing a single corner. In order to make the selection, a hierarchical selection criteria was defined. In order of importance, the selection criteria included:

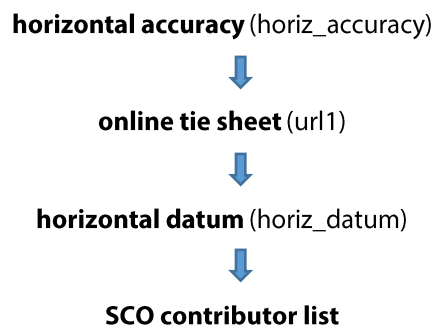

To identify the corner points used in the creation of the E3_PLSS_Sections, select all records with *display_flag* = '1'.

[Polygons to Section Level](#)

The goal of E3 was to create a more spatially accurate representation than the DNR Landnet provides. **E3 includes section-level polygons created from high-quality, locally maintained corner coordinate information.** When possible, local-level data was used in section polygon construction. In cases where the horizontal accuracy of local-level data was unknown, GLO Landnet corner coordinate information was used.

[Polygons to Quarter-Section and Quarter-Quarter-Section Level](#)

E3 is the first version of the statewide PLSS database to include quarter-section and quarter-quarter-section polygon layers. The methods by which these subdivisions are created required the use of DNR Landnet section centers, DNR Landnet quarter-section centers and DNR Landnet quarter-quarter-section corners. The point types listed were not part of the original GLO survey of the state and in most cases are not points that are surveyed or maintained by the counties. In order to construct polygons to these more granular levels, the use of these artificial points was required.

For these reasons, **it is emphasized that the quarter-section and quarter-quarter-section polygon boundaries and the points on which they are based were subdivided by protraction and based on protracted points. These section subdivisions should be used only for mapping and reference purposes and are not representative of actual surveyed quarter sections or quarter-quarter sections.**

[Identification of non-PLSS areas](#)

The E3 database uses a GLO/non-GLO flag as a mechanism to differentiate corners surveyed in the original GLO survey. The corners in the original GLO survey can be identified where the '*glo*' attribute has a value of '*true*'.

[E3 Database Availability](#)

The E3 database is available in File Geodatabase feature class format, an industry-standard format and can be downloaded [here](#). The E3 layers are also available as feature services, allowing for web application integration. These feature service links can be found [here](#).

[Web App Integration \(Survey Control Finder\)](#)

Survey Control Finder (SCF) is a web application that provides a central point of access to various sets of control points across the state and is maintained by the State Cartographer's Office. This application is used extensively by the surveying community. Some of the control datasets include National Geodetic Survey (NGS) control points, Wisconsin Department of Transportation Height Modernization Program (HMP) control points, Wisconsin Continuously Operating Reference System (WISCORS) control points, as well as PLSS corners.

The new E3_PLSS_corners layer will also be integrated in the [Survey Control Finder](#) application to expand and increase the number of current PLSS corners that are displayed in the application. The primary focus and value of the application lies within the points and their respective attributes. The E3 PLSS dataset as a whole provides additional information and derivatives not applicable to SCF application, particularly the polygon layers provided.

[Automated Updates](#)

The E3 database is compatible with the long-term goal of performing automated updates of corner coordinates, including replacement of GLO Landnet coordinates. This is achieved by preserving all known corner coordinate records for every PLSS corner, and using database attributes to identify the source, quality and other aspects of the corner. Over time, as more accurate county data becomes available, a comparison workflow and tool are being developed that will allow for the identification of new and improved records. This will allow for their integration into the next version of the Statewide PLSS database.

[E3 PLSS to DNR Landnet Comparison](#)

DNR Landnet was created in the 1990s by the Wisconsin Department of Natural Resources (DNR) to serve as spatial representation of the PLSS, primarily for cartographic needs. It was derived primarily from 1:24,000 scale topographic maps.

The E3_PLSS_corners improve on DNR Landnet's spatial accuracy by being based on real-world coordinates, where available, which contain a higher degree of horizontal accuracy. These improved corner accuracies in turn lead to more accurate polygon representations. As remonumentation and maintenance efforts progress across the state, and additional, more accurate corners are integrated into the Statewide PLSS database, it can be expected that the PLSS polygon data will continue to reflect improved accuracy.

[E3 to DNR Landnet Crosswalks](#)

The tables below depict the attribute field crosswalks from the E3 PLSS datasets to DNR Landnet and the respective layers available.

Landnet Node Attribute Table	E3_PLSS_corners
CLASS	corner_type
STATUS	-
FEATURE	-
SOURCE	-
DTRCORNER1	-
DTRCORNER2	-
DTRCORNER3	-
DTRCORNER4	-
CORN_ID	romportl_num**

Landnet PLSS Sections	E3_Section_polygons
AREA	-
PERIMETER	-
DTRS_	-
DTRS_ID	-
DTRS	dtrs
DIR	merid_dir
TWP	township_num
RNG	range_num
SEC	section_num

Landnet PLSS	
Quarter-Sections	E3_QuarterSection_polygons
PLSS_DTRSQ	dtrsqq
PLSS_RNG_D	merid_dir
PLSS_TWN_I	township_num
PLSS_RNG_I	range_num
PLSS_SCTN	section_num
PLSS_Q1_SC	quarter_num
STATE_FIPS	-
PLSS_DESC	-

Landnet PLSS		
Quarter	Quarters	E3_QuarterQuarterSection_polygons
PLSS_DTRSQ		dtrsqq
PLSS_RNG_D		merid_dir
PLSS_TWN_I		township_num
PLSS_RNG_I		range_num
PLSS_SCTN		section_num
PLSS_Q1_SC		quarter_num
PLSS_Q2_SC		quarter_quarter_num
STATE_FIPS		-
PLSS_DESC		-

DATABASE LIMITATIONS

Polygon Derivatives

The E3 PLSS database uses corner points identified by the “Display Flag” field to construct polygon representations of the PLSS in a manner similar to what currently exists for DNR Landnet. A number of polygon layers are included within this deliverable. As a result of complexities involved with creating polygons using section, quarter-section and meander corners, some minor gaps and overlaps between adjacent sections can occur. These geometric complications will be reduced through future versions of the PLSS database, as more high-quality, local-level corner data becomes available.

Local Data Availability

The amount and robustness of digital data available from the contributors varies greatly across the state. Some counties have all of their remonumentation efforts fully complete, records and attributes in digital format and have progressed into a maintenance phase. Other counties are in the very early stages of remonumentation and digitization efforts. For these reasons, varying degrees of completeness and coverage will be observed across the counties.

The table below illustrates the number of corner records present for each county in the E3 PLSS database, as well as the number of records with complete geometry. A **complete geometry** refers to a point that would be present on the map because all required information (X and Y coordinates, horizontal datum and adjustment, and coordinate reference system) was available at the local-level in a database exportable digital format when data was submitted to SCO in 2021, allowing for the creation of the point location.

In the table you will observe instances where the ‘# of records’ varies from the ‘# of records w/ complete geometry’, in some cases there are significant discrepancies. When present, the causes of these discrepancies varies from one county to the next. Often times, this is a result of some missing or ambiguous coordinate reference information, which resulted in the inability to create a complete geometry. As noted previously, those corners without complete geometry are maintained as tabular records in the E3 PLSS database.

To contact individual county surveyors, consult the local government’s [land information websites](#) first, or contact the city or county land information office or [surveyor](#) directly.

Contributor	# of records	# records w/ complete geometry	Contributor	# of records	# records w/ complete geometry
ADAMS	2090	1928	LINCOLN	2796	2796
ASHLAND	1937	241	MANITOWOC	10205	10194
BARRON	3074	3074	MARATHON	5049	5029
BAYFIELD	3989	3989	MARINETTE	5429	5429
BROWN	2579	2548	MARQUETTE	556	556
BUFFALO	2198	2198	MENOMINEE	195	195
BURNETT	4071	4071	MONROE	2849	2404
CALUMET	2284	2284	OCONTO	2414	2414
CHIPPEWA	3285	3227	ONEIDA	8644	6819
CLARK	3633	3458	OUTAGAMIE	4067	4067
COLUMBIA	2684	2684	PEPIN	1597	1597
CRAWFORD	2266	2266	PIERCE	2348	2343
DANE	5041	461	POLK	6079	6043
DODGE	3755	3755	PORTAGE	2948	2948
DOOR	4266	4266	PRICE	2492	1490
DOUGLAS	4433	4433	RICHLAND	2526	1880
DUNN	2281	2281	ROCK	2408	2408
EAU CLAIRE	2153	1612	RUSK	2750	1744
FLORENCE	1158	1158	SAUK	3175	1949
FOND DU LAC	11886	11886	SAWYER	4891	4888
FOREST	38	38	SEWRPC	25755	25755
GRANT	160	159	SHAWANO	3589	3589
GREEN	2112	2112	SHEBOYGAN	2286	2286
GREEN LAKE	1912	1653	ST CROIX	2314	2314
IOWA	3621	3226	TAYLOR	3265	3265
IRON	2548	2548	TREMPEALEAU	2321	2321
JACKSON	15144	15144	VERNON	2802	2796
JEFFERSON	2094	2094	VILAS	4774	2881
JUNEAU	2236	2114	WASHBURN	3394	3394
KEWAUNEE	2897	2897	WAUPACA	2910	2885
LA CROSSE	2380	1785	WAUSHARA	674	674
LAFAYETTE	2364	998	WINNEBAGO	2192	2192
LANGLADE	3334	2435	WOOD	5467	5198

Counties Included

PLSS points of 72 counties were associated with GLO Landnet using valid Romportl numbers assigned according to the [Statewide PLSS Corner Numbering System](#) using PLSS corner data provided by the counties. For 41 counties that provided a complete Romportl number, the submitted Romportl Number was used unless changes for special cases—closing corners, meander corners, and excess or deficiency in section length—were necessary to comply with the Statewide PLSS Corner Numbering System.

Romportl numbers were constructed for the remaining counties by combining their corner components. Since constructing valid Romportl numbers relies on the completeness and quality of the PLSS corner components—direction, township, range, section and corner number—missing components from county corner data represents a challenge. Valid Romportl numbers were constructed for counties (2) that submitted all the corner components or counties (17) that missed one component but provided reliable data to determine the missing component.


The remaining 12 counties had several missing parts needed for the construction of a valid Romport number. In these cases, spatial joins were performed between the PLSS points of the counties and the GLO Landnet to obtain valid Romportl numbers. Romportl numbers for meander corners were calculated using the geometries of PLSS corner provided by the 72 counties in previous submissions and were assigned to E3 PLSS corner points.

Non-PLSS Areas

Non-PLSS areas (in portions of Brown, Outagamie, Calumet and Crawford counties) are included as standard sections in the E3_PLSS_Sections feature class. The sections were created using section, quarter-section and meander corners. The accurate portrayal of non-PLSS areas requires the incorporation of not only meander corners, but also meander points. Unfortunately, meander points are not available in digital format. The absence of this digital data makes it impossible to accurately depict these non-PLSS areas.

SCO Points

Points with a contributor value of “SCO” were created to close sections along the Michigan border, Mississippi River, and eastern border with Lake Michigan, where no Landnet or county points existed. These SCO points generally fall into neighboring states (Michigan or Minnesota) and do not represent real PLSS section corners. Their purpose is simply to allow the section polygons to close. In future versions of the PLSS layer meander corners in these areas may allow for the elimination of some SCO points.

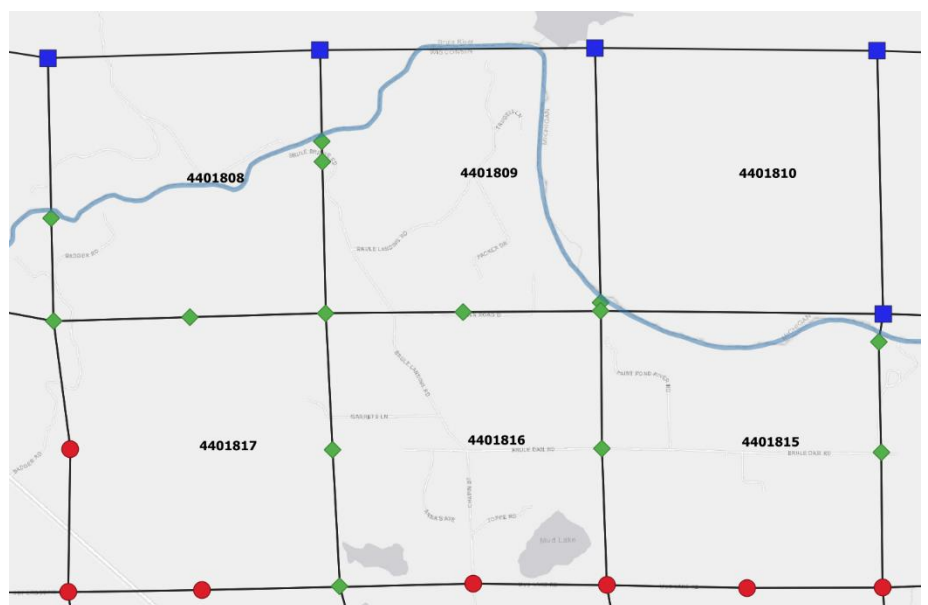

Example of SCO points added (blue squares) in Michigan to close sections 8-10 (Township 40N, Range 18E) in Florence County. (Red circles are county corners; green diamonds are from Landnet).

GEOMETRIC SPECIFICATIONS

[File Specifications](#)

The database is delivered as an Esri 10.0 File Geodatabase (.gdb) containing a single point feature class that includes all valid PLSS points and polygon feature classes containing PLSS sections, quarter-sections and quarter-quarter-sections.

[Geometric Specifications](#)

The point and polygon feature classes conforms to the following CRS (coordinate reference system) parameters:

- ▶ Datum: NAD_1983_HARN_Wisconsin_TM
- ▶ WKID: 3071
- ▶ Authority: EPSG
- ▶ Projection: Transverse Mercator
- ▶ False Easting: 520000.0
- ▶ False Northing: -4480000.0
- ▶ Central Meridian: -90.0
- ▶ Scale Factor: 0.9996
- ▶ Latitude of Origin: 0.0
- ▶ Linear Unit: Meter (1.0)

PLSS NOTES

[PLSS Corner](#)

A PLSS corner is a legal location. It marks the extremity of an area (e.g., a PLSS Section). A corner may have multiple corner points, each of which is a representation of the corner. The corner point layer contains geometric representations of corner points and their associated attributes.

The database includes all valid digital PLSS points for the 72 participating counties, regardless of grade or accuracy.

Contact Information

For inquiries related to this database, please contact:

Wisconsin State Cartographer's Office
384 Science Hall
550 North Park Street
Madison, WI 53706-1491
608-262-3065
help@sco.wisc.edu
www.sco.wisc.edu

E3 PLSS CORNER SCHEMA

PLSS Schema Legend

PLSS NAME	Denotes database field name
(Element Name)	Full English database field name (Alias Name)
<ELEMENT> [AUTO-POPULATED]	Denotes that this field is AUTO-POPULATED by the PLSS aggregation team. These fields should be left <Null> for data submission.
{TEXT:<#> CHAR}	Denotes the datatype of the field and the character length of the field

corner_id (Corner ID) [AUTO-POPULATED] {DOUBLE}

- Unique PLSS corner ID, parent class for all points associated with a PLSS corner.
- One corner may have multiple realizations.
- Number sequence begins at 100000001 and was incremented sequentially as points were added to the database. Assignment of this ID was executed by the aggregation team.
- Each unique CORNER_ID represents membership to an abstract PLSS point class. Each point participating in the abstract PLSS point class carries the same corner_id (see figure 1; all six black dots will have the same corner_id).
- Examples (this list is **not** exhaustive):
 - ▶ **100200001** ▶ **100000002**

corner_point_id (Corner Point ID) [AUTO-POPULATED] {DOUBLE}

- Unique PLSS corner point ID, parent class for all points associated with a specific monument.
- One corner may have multiple realizations (e.g., multiple monuments), thus this ID may not be unique.
- Number sequence begins at 200000001 and was incremented sequentially as points were added to the database. Assignment of this ID was executed by the aggregation team.
- Each unique CORNER_POINT_ID represents membership to a monumented point class. Each point participating in the monumented point class carries the same CORNER_POINT_ID (see figure 1; each set of three black dots within the dotted circles has the same CORNER_POINT_ID).
- In scenarios where more than one monumentation of an abstract PLSS point exists, a new CORNER_POINT_ID was used for points tied to each respective monument.
- Examples (this list is **not** exhaustive):
 - ▶ **200200001** ▶ **200000002**

corner_coord_id (Corner Coordinate ID) [AUTO-POPULATED] {DOUBLE}

- Unique PLSS corner point coordinate ID, child class to CORNER_ID and CORNER_POINT_ID, most atomic id within the database.
- Any corner point may have multiple coordinate values acquired at different times having different accuracies.
- Number sequence begins at 300000001 and was incremented sequentially as points were added to the database. Assignment of this ID was executed by the aggregation team.
- Each unique CORNER_COORD_ID represents a single point. Each point participating in the PLSS database carries this non-duplicated id (see Figure 1; each black dot has a different CORNER_COORD_ID).
- Examples (this list is **not** exhaustive):
 - ▶ **300200001** ▶ **300000002**
- **No two records have the same CORNER_COORD_ID.**

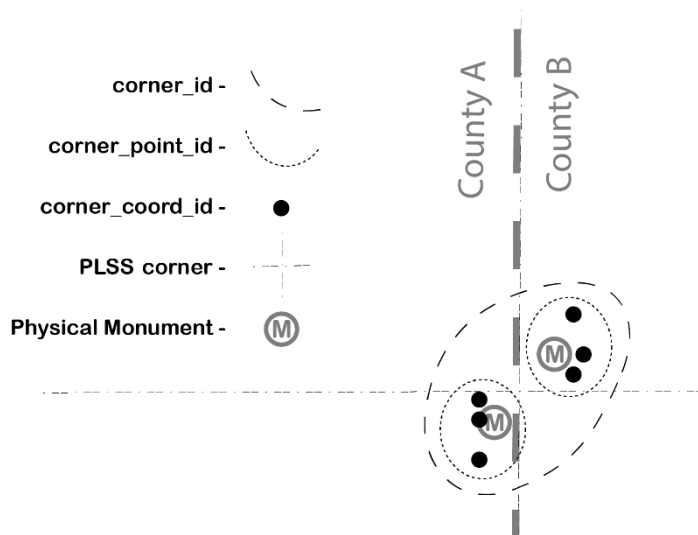


Figure 1

merid_dir (Meridian Direction) {TEXT: 4}

- The Meridian Direction indicates the direction from which the point relates to the principal meridian. Two valid domains were applied within Wisconsin. The value 4 indicates east of the principal meridian and 2 indicates west of the principal meridian.

township_num (Township Number) {TEXT: 4}

- The Township Number indicates the PLSS Township as numbered from south to north starting at Wisconsin's baseline.
- Numbers are formatted as a two-digit text string and range from the southernmost part of Wisconsin's border as 01 to the northernmost part of the state as 53.

range_num (Range Number) {TEXT: 4}

- The Range Number indicates the number of PLSS townships east or west of Wisconsin's Principal Meridian.
- Numbers are formatted as a two-digit text string and emanate from the Principal Meridian starting as 01.
- Numbers increment toward the easternmost part of the state, with the maximum extent of 30.
- Numbers increment toward the westernmost part of the state, with the maximum extent of 20.

section_num (Section Number) {TEXT: 4}

- The Section Number indicates one of 36 divisions within a PLSS township.
- Numbers are formatted as a two-digit text string and are only unique within each township.
- Numbers increment starting from 01 in the northeastern part of the township and serpentine to 36 in the southeastern part of the township.

corner_num (Corner Number) {TEXT: 4}

- The Corner Number identifies a PLSS corner based on its position within the respective section. See figure 2.
- Numbers are formatted as a four-digit text string and are only unique within each section.
- Also widely known as a component to the “Romportl Number” (www.sco.wisc.edu/wp-content/uploads/2014/08/Wisconsin_Corner_Point_Identification_System.pdf)

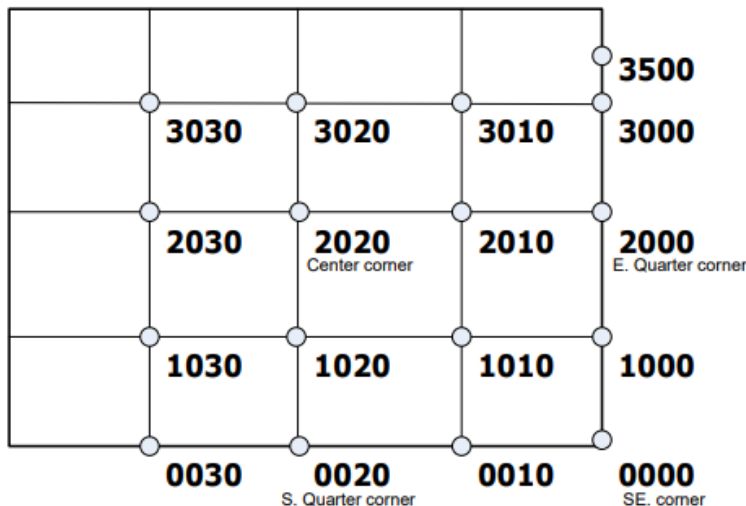


Figure 2

romportl_num (Romportl Number) [AUTO-POPULATED] {TEXT: 11}

- The Romportl Number uniquely identifies an abstract PLSS corner.
- Numbers are formatted as an eleven-digit text string and are unique for each PLSS corner across Wisconsin.
- Number is a composite of **MERID_DIR** + **TOWNSHIP_NUM** + **RANGE_NUM** + **SECTION_NUM** + **CORNER_NUM** elements.
- Also known as the “Wisconsin Point Identification system,” the Romportl Number was developed by a special committee chaired by Mike Romportl, Oneida County Surveyor in the early 1990’s. This system has been adopted by the Wisconsin Department of Natural Resources (WDNR) in their Land Net program.
- See the Romportl Number specification (<https://www.sco.wisc.edu/wp-content/uploads/2020/08/romportl-standard-ver2-07192019.pdf>) for further information and notes on special situations.
- All numbers are eleven digits in length and will always begin with a 2 or a 4.
 - ▶ E.g.:
 - ▶ 43609162020
 - ▶ 43709360000

contributor_corner_id (Contributor Corner ID) {TEXT: 100}

- The Contributor Corner ID **uniquely** identifies a PLSS corner as assigned by the contributor.

contributor_corner_id2 (Contributor Corner ID 2) {TEXT: 100}

- A secondary PLSS corner id assigned by the contributor, if available.

contributor (Contributor) [AUTO-POPULATED] {TEXT: 50 CHAR}

- Indicates name of the data source, county or other entity contributing the PLSS dataset.
- Domain values were standardized as shown in the County and Regional Planning Commission Naming Conventions Codes table.

x (x Coordinate) {TEXT: 100 CHAR }

- The **x** coordinate value of the point, such as **Easting** or **Longitude**.

y (y Coordinate) {TEXT: 100 CHAR }

- The **y** coordinate value of the point, such as **Northing** or **Latitude**.

elev (Elevation) {TEXT: 100 CHAR }

- The elevation value of the point.

horiz units (Horizontal Units) {TEXT: 50 CHAR }

- The horizontal units used to express values in **X** and **Y** fields.
- Examples include:
 - ▶ Meters
 - ▶ U.S. Survey Feet
 - ▶ DMS (Degrees Minutes Seconds)
 - ▶ DD (Decimal Degrees)

coord system (Coordinate System) {TEXT: 100 CHAR }

- The coordinate reference system used to express values in **X** and **Y** fields.
- When provided, the coordinate system version was standardized.

horiz datum (Horizontal Datum) {TEXT: 50 CHAR }

- The horizontal datum used to express values in **X** and **Y** fields.
- When provided, the horizontal datum version was standardized.

horiz accuracy (Horizontal Accuracy) {TEXT: 100 CHAR }

- The accuracy metric for the values in **X** and **Y** fields.
- This value may be different from the value within **VERT_ACCURACY** (Vertical Accuracy)
 - ▶ The following grade types have formal definitions:
 - ▶ **SURVEY GRADE** – coordinates collected under the direction of a Professional Land Surveyor, in a coordinate system allowed by 236.18(2), and obtained by means, methods and equipment capable of repeatable 2 centimeter or better precision
 - ▶ **SUB-METER** – point precision of 1 meter or better
 - ▶ **APPROXIMATE** – point precision within 5 meters or coordinates derived from public records or other relevant information
- When provided, the horizontal accuracy value was standardized.

elev type (Elevation Type) {TEXT: 100 CHAR }

- Describes the measurement type for values in the **ELEV** (Elevation) field, if provided by the contributor.

vert units (Vertical Units) {TEXT: 50 CHAR}

- The units used to express values in the ELEV (Elevation) field, if provided by the contributor.
- Examples include:
 - ▶ Meters
 - ▶ U.S. Survey Feet

vert datum (Vertical Datum) {TEXT: 100 CHAR}

- The vertical datum used to express values in the ELEV (Elevation) field, if provided by the contributor.

vert accuracy (Vertical Accuracy) {TEXT: 100 CHAR}

- The accuracy metric for the values the ELEV (Elevation) field, if provided by the contributor.

coord method (Coordinate Method) {TEXT: 100 CHAR}

- The procedure or technology used to observe or measure the coordinate values populating the **x**, **y**, and **ELEV** fields. When provided by the contributor, this field depicts how the coordinates were obtained.

coord date (Coordinate Date) {TEXT: 20 CHAR}

- The date at which coordinate values were obtained for this point.

dataset inventory date (Dataset Inventory Date) [AUTO-POPULATED] {TEXT: 20 CHAR}

- When the dataset was submitted to the PLSS project.

primary contact (Primary Contact ID) [AUTO-POPULATED] {TEXT: 3 CHAR}

- A three-digit ID as text representing the primary contact and matching the Contact Table.

secondary contact (Secondary Contact ID) [AUTO-POPULATED] {TEXT: 3 CHAR}

- A three-digit ID as text representing the secondary contact and matching the Contact Table, if available.

other contacts (Other Contact ID) [AUTO-POPULATED] {TEXT: 50 CHAR}

- A three-digit ID as text representing additional contacts.
- This field may include more than one ID, separated by comma.

monument type (Monument Type) {TEXT: 255 CHAR}

- Indicates the material used to construct the monument of the corner.

monument date (Monument Set Date) {TEXT: 50 CHAR}

- The date at which the monument was physically placed in the ground.

corner type (Corner Type) {TEXT: 50 CHAR}

- Indicates the PLSS Type of corner.
- Examples:
 - ▶ SC (Section Corner)
 - ▶ C (Center)
 - ▶ TC (Township Corner)
 - ▶ CC (Closing Corner)
 - ▶ QC (Quarter Corner)
 - ▶ QQC (Quarter-Quarter Corner)
 - ▶ MC (Meander Corner)
 - ▶ WC (Witness Corner)
 - ▶ AP (Angle Point)
 - ▶ GLC (Government Lot Corner)
 - ▶ OTHER

display flag (Display Flag) [AUTO-POPULATED] {TEXT: 2}

- Binary flag to indicate if this coordinate is used to display or generate a map coordinate (or polygon vertex). A value of "1" indicates that the point is displayed or used for polygon generation. A value of "0" indicates the point is not used.
- Only one "1" value per corner is allowed, but multiple "0" values per corner are acceptable.
- Acceptable domains (this list **is** exhaustive):
 - ▶ 1 (on) ▶ 0 (off)

glo (GLO Survey) [AUTO-POPULATED] {TEXT: 50 CHAR}

- Classifies the Corner as having been surveyed by the General Land Office (GLO).
- The exact same ("true" or "false") value should be applied to each corner point representing a GLO Corner.
- Acceptable domains (this list **is** exhaustive):
 - ▶ **true** (GLO)
 - ▶ **false** (NOT GLO)
 - ▶ **Null** (No join to GLO Landnet)

url1 (URL 1) {TEXT: 255 CHAR}

- A valid and live hyperlink to the remote resource for the corner (e.g., tie sheet).

url2 (URL 2) {TEXT: 255 CHAR}

- A valid and live hyperlink to an additional remote resource for the corner (e.g., tie sheet), if provided by the contributor.

url other (URL Other) {TEXT: 255 CHAR}

- A valid and live hyperlink to an additional remote resource for the corner (e.g., tie sheet), if provided by the contributor.

comment (Comment) {TEXT: 255 CHAR}

- A freeform field, meant to store any notes or comments that could be valuable to a user of this database when provided by the contributor.

extended romportl (Extended Romportl) [AUTO-POPULATED] {TEXT: 255 CHAR}

- A extended romportl number needed to accommodate several special cases known to occur in Wisconsin including:
 - ▶ Fractional townships, such as Township 29N Range 21-1/2E in Marinette and Oconto counties.
 - ▶ Corners in adjacent states to which surveys in Wisconsin are tied. Such corners may be referenced to a meridian other than the Extended 4th Principal Meridian
 - ▶ More information can be found here: <https://www.sco.wisc.edu/wp-content/uploads/2019/07/extended-corner-numbering-standard-ver07022019.pdf>

primary contact name (Primary Contact Name) [AUTO-POPULATED] {TEXT: 100 CHAR}

- Primary contact name

primary contact email (Primary Contact Email) [AUTO-POPULATED] {TEXT: 100 CHAR}

- Primary contact email

primary contact phone (Primary Contact Phone) [AUTO-POPULATED] {TEXT: 20 CHAR}

- Primary contact phone number

County and Regional Planning Commission Naming Conventions

- Spelling conventions for Regional Planning Commission (RPC), County and other contributors:

ADAMS	IOWA	POLK
ASHLAND	IRON	PORTAGE
BARRON	JACKSON	PRICE
BAYFIELD	JEFFERSON	RACINE
BROWN	JUNEAU	RICHLAND
BUFFALO	KENOSHA	ROCK
BURNETT	KEWAUNEE	RUSK
CALUMET	LA CROSSE	ST CROIX
CHIPPEWA	LAFAYETTE	SAUK
CLARK	LANGLADE	SAWYER
COLUMBIA	LINCOLN	SHAWANO
CRAWFORD	MANITOWOC	SHEBOYGAN
DANE	MARATHON	TAYLOR
DODGE	MARINETTE	TREMPEALEAU
DOOR	MARQUETTE	VERNON
DOUGLAS	MENOMINEE	VILAS
DUNN	MILWAUKEE	WALWORTH
EAU CLAIRE	MONROE	WASHBURN
FLORENCE	OCONTO	WASHINGTON
FOND DU LAC	ONEIDA	WAUKESHA
FOREST	OUTAGAMIE	WAUPACA
GRANT	OZAUKEE	WAUSHARA
GREEN	PEPIN	WINNEBAGO
GREEN LAKE	PIERCE	WOOD
NORTHWEST RPC	WEST CENTRAL RPC	MISSISSIPPI RIVER RPC
NORTH CENTRAL RPC	SOUTHWESTERN RPC	BAY LAKE RPC
CAPITAL AREA RPC	SOUTHEASTERN RPC	OTHER
LANDNET	SCO	US Forest Service

Table B-1. County and Regional Planning Commission Naming Conventions

E3 PLSS SECTION SCHEMA

PLSS Schema Legend

PLSS NAME	Denotes database field name
(Element Name)	Full English database field name (Alias Name)
{TEXT:<#> CHAR}	Denotes the datatype of the field and the character length of the field

dtrs (Direction Township Range Section) {DOUBLE}

- The DTRS (Direction Township Range Section) associated with each polygon identifies all PLSS sections in Wisconsin. The first digit indicates a range direction 2 = West, 4 = East. Second and third digits identify the township number (01 to 53). Fourth and fifth digits identify the range number (01 to 30). The sixth and seventh digits identify the section number (01 to 36).

merid_dir (Meridian Direction) {TEXT: 4}

- The Meridian Direction indicates the direction from which the point relates to the principal meridian. Two valid domains were applied within Wisconsin. The value 4 indicates east of the principal meridian and 2 indicates west of the principal meridian.

township_num (Township Number) {TEXT: 4}

- The Township Number indicates the PLSS Township as numbered from south to north starting at Wisconsin's baseline.
- Numbers are formatted as a two-digit text string and range from the southernmost part of Wisconsin's border as 01 to the northernmost part of the state as 53.

range_num (Range Number) {TEXT: 4}

- The Range Number indicates the number of PLSS townships east or west of Wisconsin's Principal Meridian.
- Numbers are formatted as a two-digit text string and emanate from the Principal Meridian starting as 01.
- Numbers increment toward the easternmost part of the state, with the maximum extent of 30.
- Numbers increment toward the westernmost part of the state, with the maximum extent of 20.

rf (Range Fraction) {TEXT: 2}

- Indicates fractional values such as 1/2 for range where a fractional township exists. The dtrs field values uses 1 character for the direction, and 2 characters for township, range, and section. Since the 7 character dtrs code cannot accommodate fractional townships such as Township 29N Range 21-1/2E, which Oconto and Marinette counties share, this additional field is needed to identify the fractional range of 1/2.
- 0 = No Fractions
- 2 = 1/2

section_num (Section Number) {TEXT: 4}

- The Section Number indicates one of 36 divisions within a PLSS township.
- Numbers are formatted as a two-digit text string and are only unique within each township.
- Numbers increment starting from 01 in the northeastern part of the township and serpentine to 36 in the southeastern part of the township.

E3 PLSS QUARTER-SECTION SCHEMA

PLSS Schema Legend	
<u>PLSS NAME</u>	Denotes database field name
(Element Name)	Full English database field name (Alias Name)
{TEXT:<#> CHAR}	Denotes the datatype of the field and the character length of the field

dtrsq (Direction Township Range Section Quarter-Section) {DOUBLE}

- The DTRSQ (Direction Township Range Section Quarter-Section) associated with each polygon identifies all PLSS Quarter-sections in Wisconsin. The first digit indicates a range direction 2 = West, 4 = East. Second and third digits identify the township number (01 to 53). Fourth and fifth digits identify the range number (01 to 30). The sixth and seventh digits identify the section number (01 to 36). The eighth digit identifies the quarter-section number (1-4).

merid_dir (Meridian Direction) {TEXT: 4}

- The Meridian Direction indicates the direction from which the point relates to the principal meridian. Two valid domains were applied within Wisconsin. The value 4 indicates east of the principal meridian and 2 indicates west of the principal meridian.

township_num (Township Number) {TEXT: 4}

- The Township Number indicates the PLSS Township as numbered from south to north starting at Wisconsin's baseline.
- Numbers are formatted as a two-digit text string and range from the southernmost part of Wisconsin's border as 01 to the northernmost part of the state as 53.

range_num (Range Number) {TEXT: 4}

- The Range Number indicates the number of PLSS townships east or west of Wisconsin's Principal Meridian.
- Numbers are formatted as a two-digit text string and emanate from the Principal Meridian starting as 01.
- Numbers increment toward the easternmost part of the state, with the maximum extent of 30.
- Numbers increment toward the westernmost part of the state, with the maximum extent of 20.

rf (Range Fraction) {TEXT: 2}


- Indicates fractional values such as ½ for range where a fractional township exists. The dtrs field values uses 1 character for the direction, and 2 characters for township, range, and section. Since the 7 character dtrs code cannot accommodate fractional townships such as Township 29N Range 21-1/2E, which Oconto and Marinette counties share, this additional field is needed to identify the fractional range of ½.
- 0 = No Fractions
- 2 = ½

section num (Section Number) *{TEXT: 4}*

- The Section Number indicates one of 36 divisions within a PLSS township.
- Numbers are formatted as a two-digit text string and are only unique within each township.
- Numbers increment starting from 01 in the northeastern part of the township and serpentine to 36 in the southeastern part of the township.

quarter num (Quarter Section Number) *{TEXT:4}*

- The Quarter Section Number indicates one of the 4 division within a plss section
- Numbers are formatted as a one-digit text string
- Numbers increment starting at 1 in the northeastern quarter of the section and move counter-clockwise to the southeastern quarter



Quarter-Section Labeling Diagram

E3 PLSS QUARTER-QUARTER-SECTION SCHEMA

PLSS Schema Legend	
PLSS NAME	Denotes database field name
(Element Name)	Full English database field name (Alias Name)
<i>{TEXT:<#> CHAR}</i>	Denotes the datatype of the field and the character length of the field

dtrsqa (Direction Township Range Section Quarter-Section Quarter-Quarter-Section) *{DOUBLE}*

- The DTRSQQ (Direction Township Range Section Quarter-Section Quarter-Quarter-Section) associated with each polygon identifies all PLSS Quarter-sections in Wisconsin. The first digit indicates a range direction 2 = West, 4 = East. Second and third digits identify the township number (01 to 53). Fourth and fifth digits identify the range number (01 to 30). The sixth and seventh digits identify the section number (01 to 36). The eighth digit identifies the quarter-section number (1-4). The ninth digit identifies the quarter-quarter-section.

merid dir (Meridian Direction) *{TEXT: 4}*

- The Meridian Direction indicates the direction from which the point relates to the principal meridian. Two valid domains were applied within Wisconsin. The value 4 indicates east of the principal meridian and 2 indicates west of the principal meridian.

township num (Township Number) *{TEXT: 4}*

- The Township Number indicates the PLSS Township as numbered from south to north starting at Wisconsin's baseline.
- Numbers are formatted as a two-digit text string and range from the southernmost part of Wisconsin's border as 01 to the northernmost part of the state as 53.

range num (Range Number) {TEXT: 4}

- The Range Number indicates the number of PLSS townships east or west of Wisconsin's Principal Meridian.
- Numbers are formatted as a two-digit text string and emanate from the Principal Meridian starting as 01.
- Numbers increment toward the easternmost part of the state, with the maximum extent of 30.
- Numbers increment toward the westernmost part of the state, with the maximum extent of 20.

rf (Range Fraction) {TEXT: 2}

- Indicates fractional values such as 1/2 for range where a fractional township exists. The dtrs field values uses 1 character for the direction, and 2 characters for township, range, and section. Since the 7 character dtrs code cannot accommodate fractional townships such as Township 29N Range 21-1/2E, which Oconto and Marinette counties share, this additional field is needed to identify the fractional range of 1/2.
- 0 = No Fractions
- 2 = 1/2

section num (Section Number) {TEXT: 4}


- The Section Number indicates one of 36 divisions within a PLSS township.
- Numbers are formatted as a two-digit text string and are only unique within each township.
- Numbers increment starting from 01 in the northeastern part of the township and serpentine to 36 in the southeastern part of the township.

quarter num (Quarter-Section Number) {TEXT:4}

- The Quarter-Section Number indicates one of the 4 division within a PLSS section
- Numbers are formatted as a one-digit text string
- Numbers increment starting at 1 in the northeastern quarter of the section and move counter-clockwise to the southeastern quarter

quarter quarter num (Quarter-Quarter Section Number) {TEXT:4}

- The Quarter-Quarter-Section Number indicates one of the 4 divisions within a PLSS quarter-section
- Numbers are formatted as a one-digit text string
- Numbers increment starting at 1 in the northeastern quarter of the quarter-section and move counter-clockwise to the southeastern quarter of the quarter-section



Quarter-Quarter-Section Labeling Diagram